

Undercounter unit for buffets

InvisiFreeze™ L GN(4/1)

Article number 1 60 200 01



Cooling unit for invisible installation under surfaces made of various materials such as artificial stone or glass.

Advantages:

- ✓ A maximum of flexibility in designing individual, modern buffet furniture
- ✓ Cover material can be used as a continuous surface without cut-outs
- ✓ Even surface that can be easily cleaned and disinfected
- ✓ Highly energy-efficient due to modern technology
- ✓ Precise power regulation at the touch of a button


Features:

4 power levels	temperature range: approx. -10°C to 10°C ¹⁾
Direct control on device or	external control panel or infrared remote control (optional)
InvisiFreeze™ Bus	up to 16 units in a network can be controlled with one panel
USB port	for software updates and read-out

1) The surface temperature, especially the minimum temperature, depends on various factors such as humidity, room/ambient temperature, material thickness and nature of the cover plate, supply and exhaust air of the unit, etc.

Technical Data

Dimensions:	1370 x 530 x 367 mm
Weight:	30 kg
Size of cooling area:	GN 4/1
Max. power:	500 W
Input voltage range:	220-240 V AC, 50/60 Hz
Internal electrical fuse protection:	6.3 A
Cooling liquid	R290 (propane)
Connection:	customized

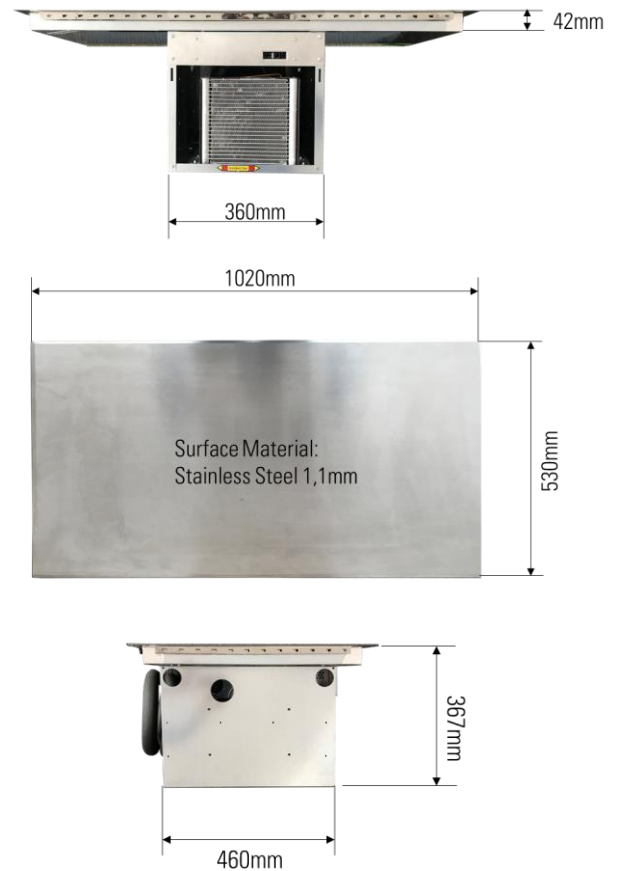

Accessories overview (optional)



Power cord 1500 mm, country specific connector, 10A



InvisiFreeze™ external control panel



InductWarm® infrared remote control (incl. battery)



Connecting cable to the external control panel



InductWarm® BUS cable, 2000 mm